

EXTREME PERFORMANCE

HIGH PRESSURE WASHER

High pressure pump/high-pressure cleaning machine
manufacturing expert

High-pressure
pumps

Electric
washer

Gasoline/diesel
cleaning machine





BRAND HISTORY

We are a professional manufacturer of all kinds of high pressure cleaning machines and high pressure pumps.

High pressure washer is mainly used in: petroleum, chemical industry, electric power, paper making, sugar, brewing, pharmaceutical, metallurgy, casting, aviation, railway and other industries. Our company has been awarded China Famous brand, ISO9001 quality management system certification and CE certification. Since its inception, has been trying to develop a variety of high-grade high pressure cleaning machines and high pressure pump products. Advanced production technology, strong technical force, scientific management system, modern production line manufacturing, as well as complete testing equipment and quality control procedures, so that the company's product quality has made a great leap forward.

Our company spirit of "quality first, forge ahead, keep improving, create first-class brand" enterprise purpose, adhering to the "sincere service, you as the respect" service concept, for customers to dedicate more modern high-end high pressure washer products with novel style and diversified design. Fully meet the taste and demand of customers at home and abroad.

We are willing to do business with all countries in the world. We welcome all interested companies to contact us for more information about our products. We look forward to having further cooperation with you in the near future.

ULTIMATEG

Modern Production Concept

The company adheres to the principle of quality first, adopts advanced production equipment, implements lean production management and TQC quality management, constantly improves the quality and taste of products, and wins the trust of customers at home and abroad with brand charm and good reputation. thus enhancing the market competitiveness of us.



Professional & Control

The company in the production process in strict accordance with the international quality system standards; Production department must undertake antenatal examination when receiving materials, each working procedure must undertake examination in the production process, after working procedure is completed, must undertake all-round performance examination to the product.


Set Performance And Convenience In One Widely Used



Car wash, farm, floor wash, construction site, swimming pool, kitchen, home car wash, boat, lumber mill...



Anatomy

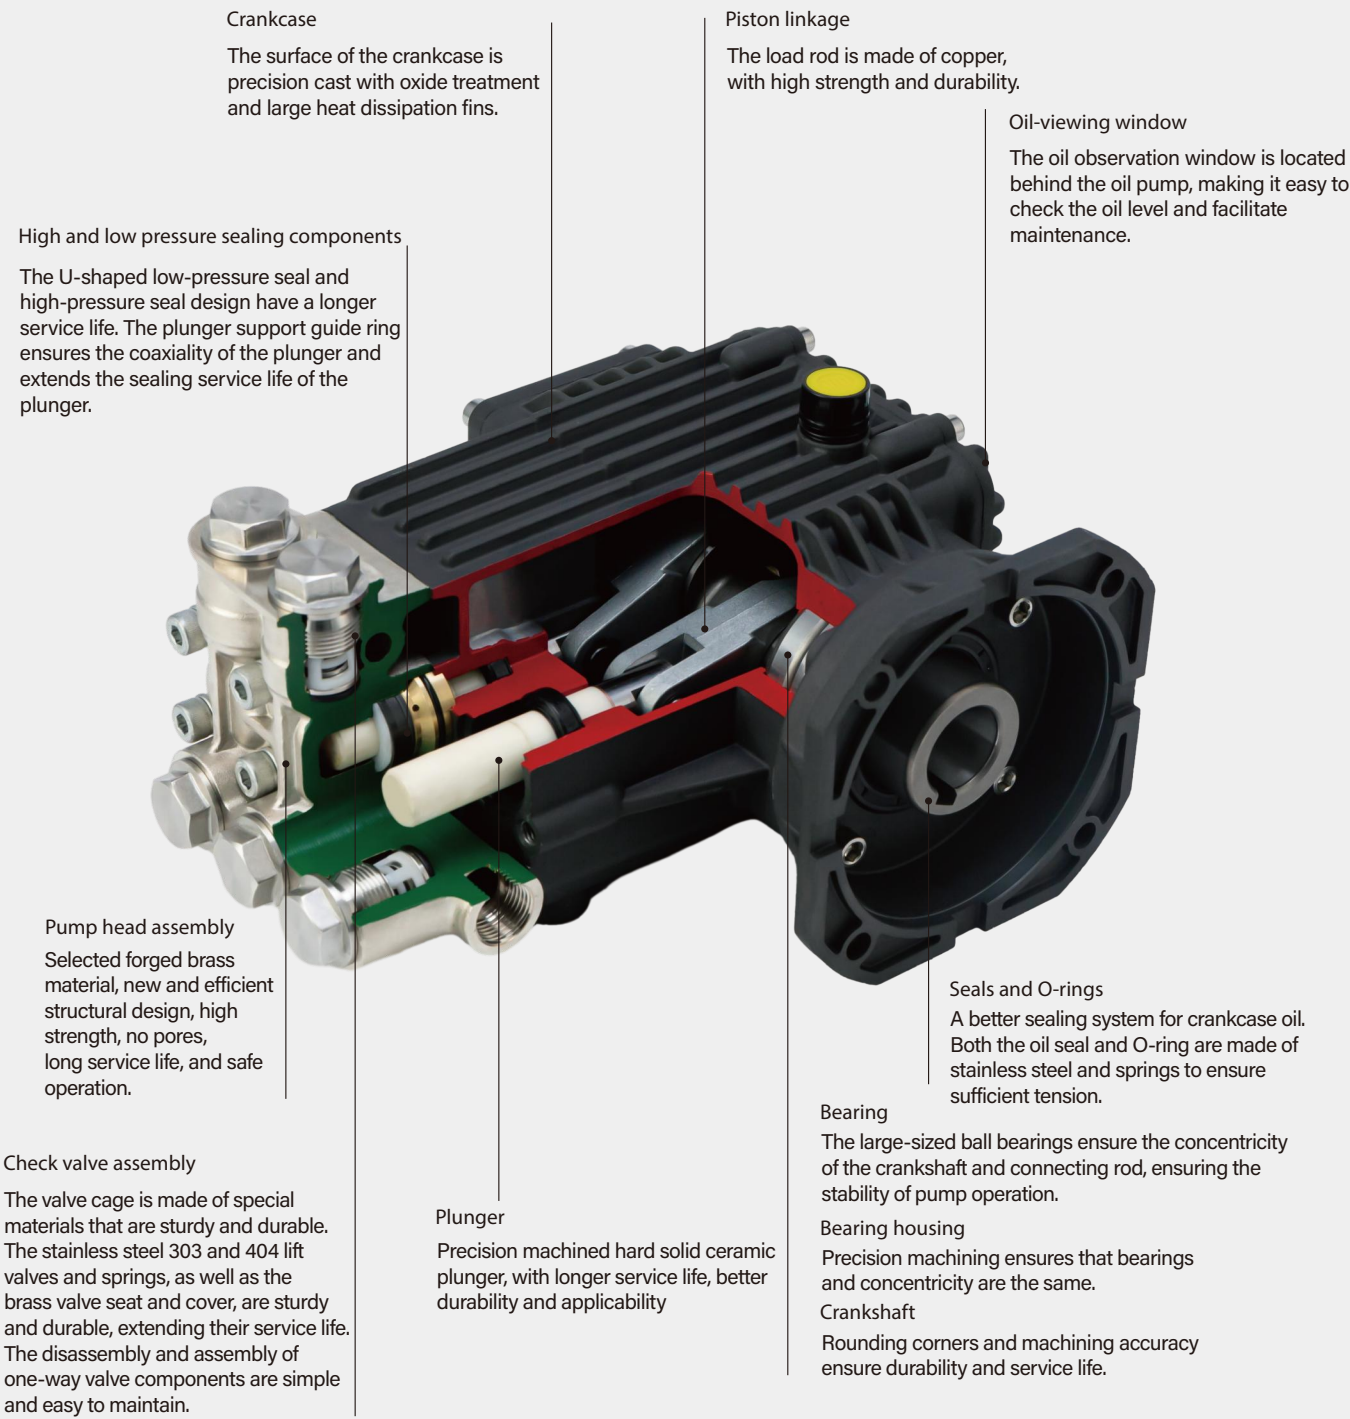

CREATE

ULTIMATE PERFORMANCE

Every time, be creative
To create more possibilities
for the world

It embodies the spirit of craftsmanship
and persistence, which can only be
achieved through unremitting efforts.



PRODUCT SUMMARY



High pressure water pump 01-10



Electric Pressure Washer Series 11-33



Pressure Washer-Wall Mounted 34



Gasoline Pressure Washer 35-36



Diesel Pressure Washer Series 37



Gas And Diesel Pipeline Dredging Series 38-39




Steam/diesel Pressure Washer 40



Accessories Series 41-46

Made of high-quality brass
High-pressure-pump-head series

Carefully crafted/structurally stable/high-speed/efficient

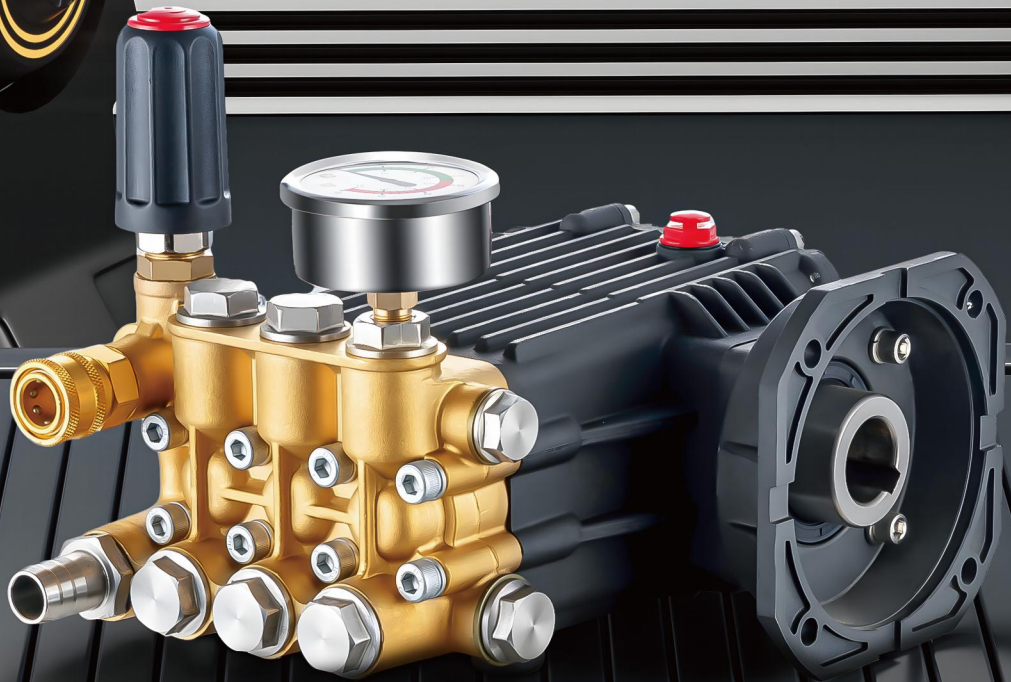

加厚材质 全铜泵头

HIGH PRESSURE
PUMP HEADS

Features

- 1. Made of high-quality brass to prevent cracking and water seepage.
- 2. High strength, high temperature integrated forging.
- 3. The output is stable and the power is strong.



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-AA1814	300	4350	15	10.0	12.0	380	1450	11	3/4"	3/8"	18	28
ZX-AA2014	250	3625	15	10.0	12.0	380	1450	11	3/4"	3/8"	20	28

Product Details



Control valves



All-copper pumphead



Crankcase




Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-AB1814	300	4350	15	10.0	12.0	380	1450	11	3/4"	3/8"	18	28
ZX-AB2012	250	3625	16	7.5	10.0	380	1450	11	3/4"	3/8"	20	28
ZX-AB2014	250	3625	20	10.0	12.0	380	1450	11	3/4"	3/8"	20	28
ZX-AB2212	200	2900	20	7.5	10.0	380	1450	11	3/4"	3/8"	22	28
ZX-AB2214	200	2900	23	10.0	12.0	380	1450	11	3/4"	3/8"	22	28

HIGH PRESSURE PUMP HEADS


Product Details

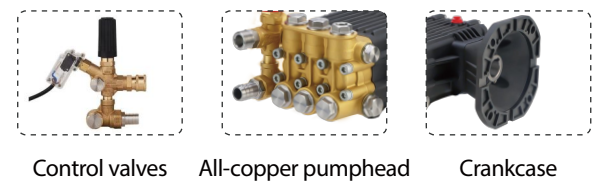

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-AC1814	300	4350	15	10.0	12.0	380	1450	11	3/4"	3/8"	18	28
ZX-AC2012	250	3625	16	7.5	10.0	380	1450	11	3/4"	3/8"	20	28
ZX-AC2014	250	3625	20	10.0	12.0	380	1450	11	3/4"	3/8"	20	28
ZX-AC2212	200	2900	20	7.5	10.0	380	1450	11	3/4"	3/8"	22	28
ZX-AC2214	200	2900	23	10.0	12.0	380	1450	11	3/4"	3/8"	22	28

Product Details


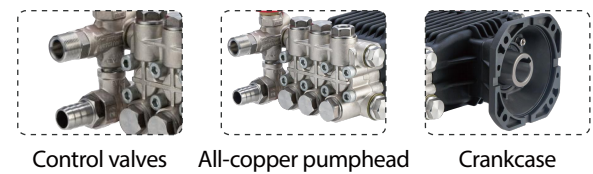


Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-AD1810	100	1450	11	2.2	3.0	220	1450	9	3/4"	3/8"	18	28
ZX-AD1812	100	1450	14	2.2	3.0	220	1450	9	3/4"	3/8"	18	28
ZX-AD1814	250	3625	15	7.5	10.0	380	1450	9	3/4"	3/8"	18	28

HIGH PRESSURE PUMP HEADS


Product Details

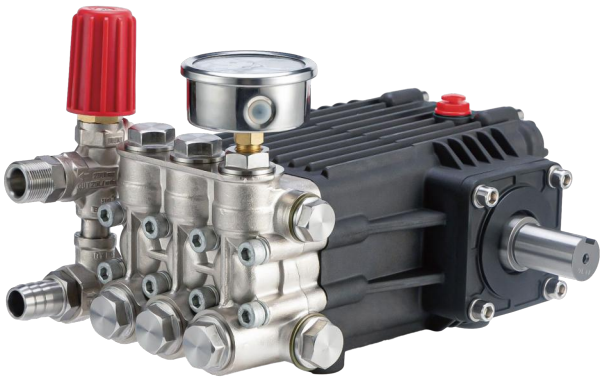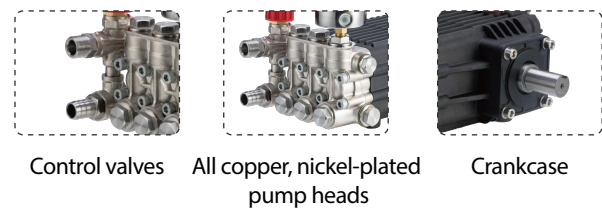

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-AE1814	300	4350	15	10.0	12.0	380	1450	11	3/4"	3/8"	18	24

Product Details

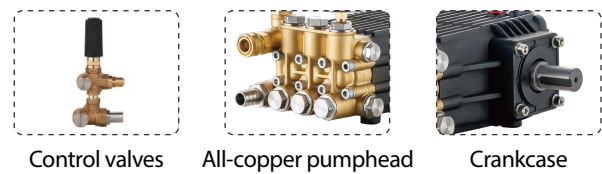


Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-AF1814	300	4350	15	10.0	12.0	380	1450	11	3/4"	3/8"	18	24
ZX-AF2012	250	3625	16	7.5	10.0	380	1450	11	3/4"	3/8"	20	24
ZX-AF2014	250	3625	20	10.0	12.0	380	1450	11	3/4"	3/8"	20	24
ZX-AF2212	200	2900	20	7.5	10.0	380	1450	11	3/4"	3/8"	22	24
ZX-AF2214	200	2900	23	10.0	12.0	380	1450	11	3/4"	3/8"	22	24

HIGH PRESSURE PUMP HEADS


Product Details

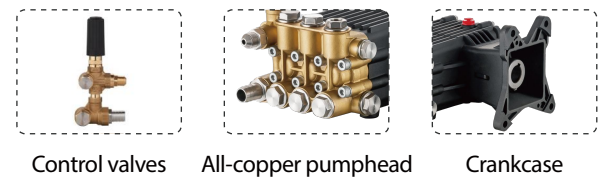

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-AG1807	250	3625	18	13		3400		11	3/4"	3/8"	18	25
ZX-AG1809	300	4350	20	15		3400		11	3/4"	3/8"	18	25.4
ZX-AG2009	200	2900	24	15		3400		11	3/4"	3/8"	20	25.4

Product Details

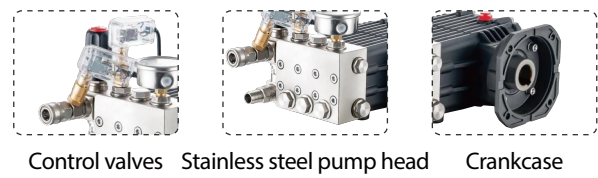


Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-AD1812	200	2900	14	4.0	5.5	380	1450	11	3/4"	3/8"	18	28
ZX-AD1814	300	4350	15	10.0	12.0	380	1450	11	3/4"	3/8"	18	28

HIGH PRESSURE PUMP HEADS


Product Details

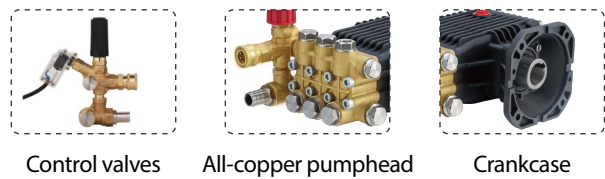

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-BA1812	200	2900	14	4.0	5.5	380	1450	9	3/4"	3/8"	18	28
ZX-BA1814	250	3625	15	7.5	10.0	380	1450	9	3/4"	3/8"	18	28

Product Details

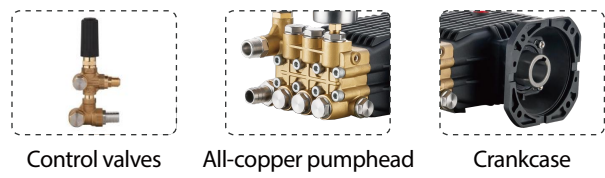


Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-BC1812	200	2900	14	4.0	5.5	380	1450	9	3/4"	3/8"	18	28
ZX-BC1814	250	3625	15	7.5	10.0	380	1450	9	3/4"	3/8"	18	28

HIGH PRESSURE PUMP HEADS


Product Details

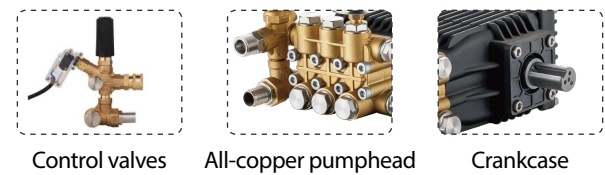

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-BD1812	200	2900	14	4.0	5.5	380	1450	9	3/4"	3/8"	18	24
ZX-BD1814	250	3625	15	7.5	10.0	380	1450	9	3/4"	3/8"	18	24

Product Details

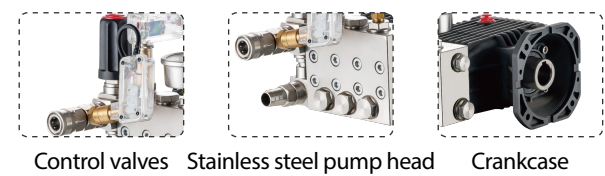


Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-BE1812	200	2900	14	4.0	5.5	380	1450	9	3/4"	3/8"	18	28
ZX-BE1814	250	3625	15	7.5	10.0	380	1450	9	3/4"	3/8"	18	28

HIGH PRESSURE PUMP HEADS


Product Details

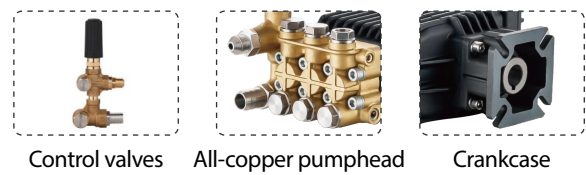

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-CA1806	120	1740	15	6.5		3400		9	3/4"	3/8"	18	19.05/20
ZX-CA1806	170	2500	15	6.5		3400		9	3/4"	3/8"	18	19.05/20

Product Details

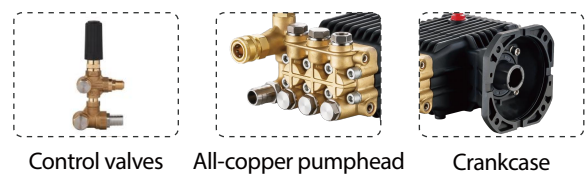


Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-CB1806	100	1450	14	2.2	3.0	220	2800	8	3/4"	3/8"	18	24
ZX-CB1812	100	1450	14	2.2	3.0	220	1450	8	3/4"	3/8"	18	24

HIGH PRESSURE PUMP HEADS


Product Details

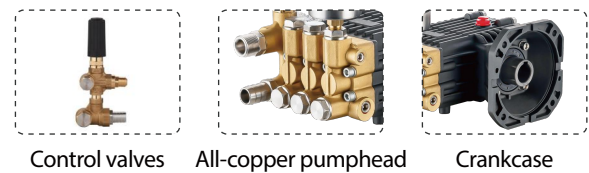

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-DA1509	100	1450	13	2.2	3.0	220	2800	6.5	3/4"	3/8"	15	19/24
ZX-DA1515	100	1450	11	2.2	3.0	220	1450	6.5	3/4"	3/8"	15	28

Product Details

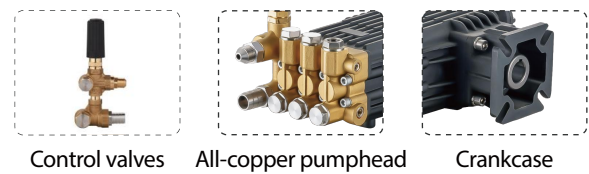


Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-DB1508	120	1740	15	6.5		3400		6.5	3/4"	3/8"	15	20

HIGH PRESSURE PUMP HEADS


Product Details

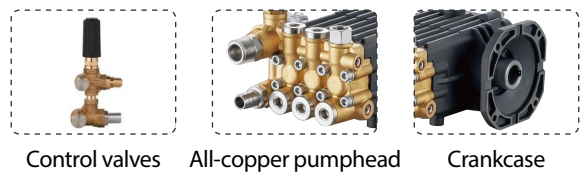

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-FA1409	100	1450	11	2.0	2.6	220	2800	4.5	3/4"	3/8"	14	19

Product Details

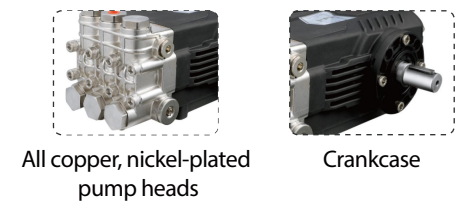

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Inlet	Outlet	Crank bore	Shaft diameter
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG			MM	MM
ZX-FB1835	350	5075	18	12.6	16.9	1450		16		3/4"		3/8"
ZX-FB2135	350	5075	21	14.7	19.7	1450		16		3/4"		3/8"
ZX-FB4020	200	2900	40	16	21.3	1450		16		3/4"		3/8"
ZX-FB4520	200	2900	45	18	21.3	1450		16		3/4"		3/8"

High quality materials

Electric pressure washer

Carefully crafted/structurally stable/high-speed/efficient



ELECTRIC PRESSURE WASHER

MERCURY

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1200	100	1450	11	2.0	2.6	220	2800	40	690x480x470

ELECTRIC PRESSURE WASHER

VENUS

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	55	705x570x525
ZX-1750	120	1750	14	2.5	3.3	220	1450	60	705x570x525
ZX-1850	130	1885	14	3.0	4.0	220	1450	60	705x570x525
ZX-2200	150	2175	14	3.0	4.0	380	1450	60	705x570x525
ZX-2900	200	2900	15	4.0	5.5	380	1450	60	705x570x525

ELECTRIC PRESSURE WASHER

EARTH

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	55	700x420x510
ZX-1750	120	1750	14	2.5	3.3	220	1450	60	700x420x510
ZX-1850	130	1885	14	3.0	4.0	220	1450	60	700x420x510
ZX-2200	150	2175	14	3.0	4.0	380	1450	60	700x420x510
ZX-2900	200	2900	15	4.0	5.5	380	1450	60	700x420x510



MARS

ELECTRIC PRESSURE WASHER

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	55	700x420x510
ZX-1750	120	1750	14	2.5	3.3	220	1450	60	700x420x510
ZX-1850	130	1885	14	3.0	4.0	220	1450	60	700x420x510
ZX-2200	150	2175	14	3.0	4.0	380	1450	60	700x420x510
ZX-2900	200	2900	15	4.0	5.5	380	1450	60	700x420x510

ELECTRIC PRESSURE WASHER

JUPITER

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	55	700x500x550
ZX-1750	120	1750	14	2.5	3.3	220	1450	60	700x500x550
ZX-1850	130	1885	14	3.0	4.0	220	1450	60	700x500x550
ZX-2200	150	2175	14	3.0	4.0	380	1450	60	700x500x550
ZX-2900	200	2900	15	4.0	5.5	380	1450	60	700x500x550



ELECTRIC PRESSURE WASHER

VENUS

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1200	100	1450	11	2.0	2.6	220	2800	32	670x600x320

ELECTRIC PRESSURE WASHER

URANUS

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-3200	220	3200	15	5.5	7.3	380	1450	100	820x460x540
ZX-3600	250	3625	15	7.5	10.0	380	1450	110	820x460x540
ZX-4350	300	4350	15	10.0	13.0	380	1450	115	820x460x540

ELECTRIC PRESSURE WASHER

CERES

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	55	650x450x600
ZX-1750	120	1750	14	2.5	3.3	220	1450	60	650x450x600
ZX-1850	130	1885	14	3.0	4.0	220	1450	60	650x450x600
ZX-2200	150	2175	14	3.0	4.0	380	1450	60	650x450x600
ZX-2900	200	2900	15	4.0	5.5	380	1450	60	650x450x600

ELECTRIC PRESSURE WASHER

PALLAS

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	55	705x570x525
ZX-1750	120	1750	14	2.5	3.3	220	1450	60	705x570x525
ZX-1850	130	1885	14	3.0	4.0	220	1450	60	705x570x525
ZX-2200	150	2175	14	3.0	4.0	380	1450	60	705x570x525
ZX-2900	200	2900	15	4.0	5.5	380	1450	60	705x570x525



ELECTRIC PRESSURE WASHER

LRIS

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	55	700x450x600
ZX-1750	120	1750	14	2.5	3.3	220	1450	60	700x450x600
ZX-1850	130	1885	14	3.0	4.0	220	1450	60	700x450x600
ZX-2200	150	2175	14	3.0	4.0	380	1450	60	700x450x600
ZX-2900	200	2900	15	4.0	5.5	380	1450	60	700x450x600

ELECTRIC PRESSURE WASHER

AEGLE

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-5075	350	5075	21	15.0	20.0	380	1450	55	1120x860x1000
ZX-7250	500	7250	22	22.0	30.0	380	1450	60	1120x860x1000
ZX-11600	800	11600	23	37.0	50.0	380	1450	60	1120x860x1000

ELECTRIC PRESSURE WASHER

SHAULA

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1200	100	1450	11	2.0	2.6	220	2800	40	700x480x470
ZX-1450	100	1450	14	2.2	3.0	220	1450	55	700x480x470
ZX-1750	120	1750	14	2.5	3.3	220	1450	60	700x480x470
ZX-1850	130	1885	14	3.0	4.0	220	1450	60	700x480x470
ZX-2200	150	2175	14	3.0	4.0	380	1450	60	700x480x470
ZX-2900	200	2900	15	4.0	5.5	380	1450	60	700x480x470

ELECTRIC PRESSURE WASHER

COMET

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1200	100	1450	11	2.0	2.6	220	2800	40	750x420x540
ZX-1450	100	1450	14	2.2	3.0	220	1450	55	750x420x540
ZX-1750	120	1750	14	2.5	3.3	220	1450	60	750x420x540
ZX-1850	130	1885	14	3.0	4.0	220	1450	60	820x460x600
ZX-2200	150	2175	14	3.0	4.0	380	1450	60	820x460x600
ZX-2900	200	2900	15	4.0	5.5	380	1450	60	820x460x600

ELECTRIC PRESSURE WASHER

MERCURY

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge




Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI		KW	HP				
ZX-1200	90	1305	10	1.8	2.4	220	2800	40	400x350x400
ZX-1200	100	1450	11	2.0	2.6	220	2800	40	400x350x400

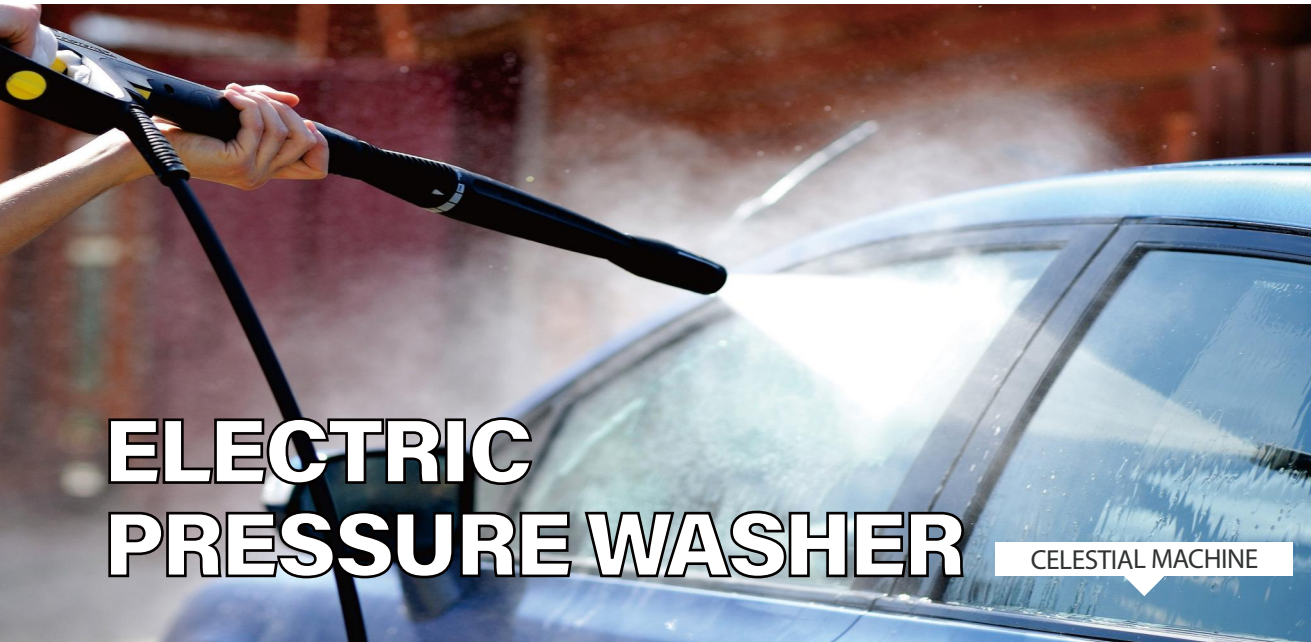

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI		KW	HP				
ZX-1200	100	1450	11	2.0	2.5	220	2800	40	620x425x380

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



ELECTRIC PRESSURE WASHER

BIG DIPPER

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down




Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	56	720X390X550
ZX-1750	120	1750	14	2.5	3.3	220	1450	60	720X390X550
ZX-1850	130	1885	14	3.0	4.0	220	1450	65	720X390X550

ELECTRIC PRESSURE WASHER

BIG DIPPER

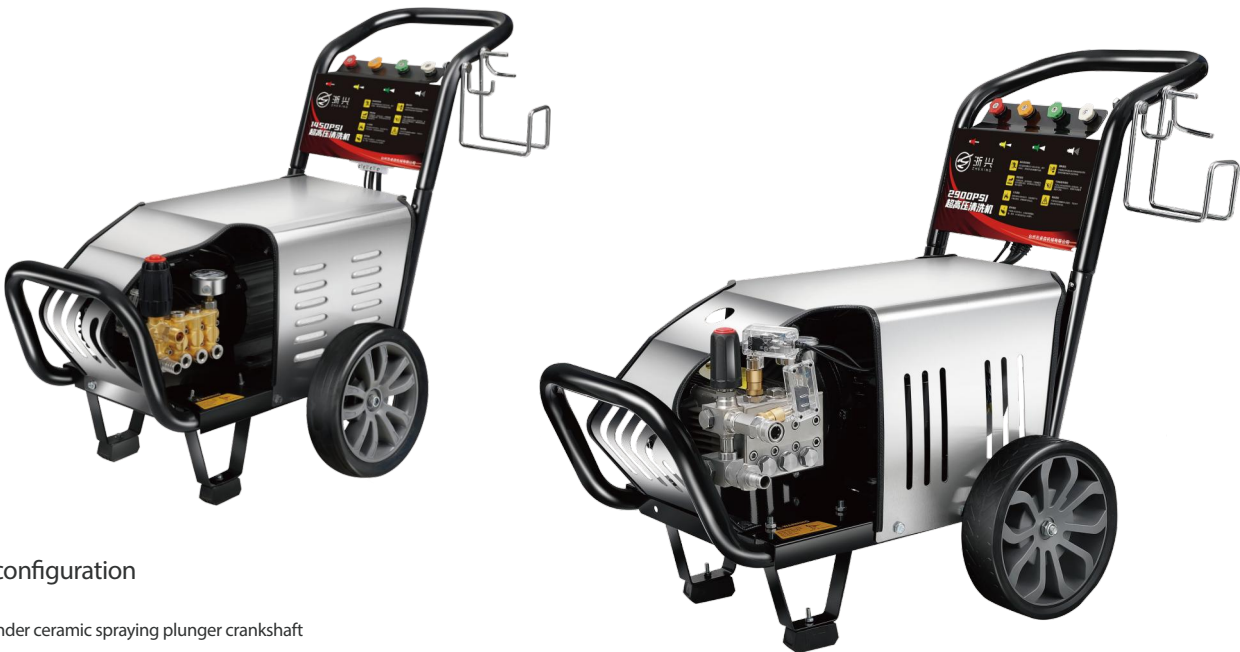

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	60	720X390X550
ZX-1750	120	1750	14	2.5	3.3	220	1450	65	720X390X550
ZX-1850	130	1885	14	3.0	4.0	220	1450	68	720X390X550
ZX-2200	150	2175	14	3.0	4.0	380	1450	63	720X390X550
ZX-2900	200	2900	15	4.0	5.5	380	1450	69	720X390X550
ZX-3200	220	3200	15	5.5	7.5	380	1450	88	860X440X550
ZX-3600	250	3625	15	7.5	10.0	380	1450	96	860X440X550
ZX-4350	300	4350	15	10.0	13.0	380	1450	108	860X440X550

ELECTRIC PRESSURE WASHER

POLARIS

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	60	680X420X500
ZX-1750	120	1750	14	2.5	3.3	220	1450	65	680X420X500
ZX-1850	130	1885	14	3.0	4.0	220	1450	65	680X420X500
ZX-2200	150	2175	14	3.0	4.0	380	1450	60	680X420X500
ZX-2900	200	2900	15	4.0	5.5	380	1450	69	680X420X500
ZX-3200	220	3200	15	5.5	7.5	380	1450	88	680X420X500
ZX-3600	250	3625	15	7.5	10.0	380	1450	96	680X420X500
ZX-4350	300	4350	15	10.0	12.0	380	1450	108	680X420X500

ELECTRIC PRESSURE WASHER

RAGING STYLE

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	60	670X360X500
ZX-1750	120	1750	14	2.5	3.3	220	1450	65	670X360X500
ZX-1850	130	1885	14	3.0	4.0	220	1450	68	670X360X500
ZX-2200	150	2175	14	3.0	4.0	380	1450	65	670X360X500
ZX-2900	200	2900	15	4.0	5.3	380	1450	69	670X360X500

ELECTRIC PRESSURE WASHER

ORIENTAL

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	60	685x395x475
ZX-1750	120	1750	14	2.5	3.3	220	1450	65	685x395x475
ZX-1850	130	1885	14	3.0	4.0	220	1450	68	685x395x475
ZX-2200	150	2175	14	3.0	4.0	380	1450	65	685x395x475
ZX-2900	200	2900	15	4.0	5.3	380	1450	69	685x395x475

ELECTRIC PRESSURE WASHER

ORIENTAL


Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down

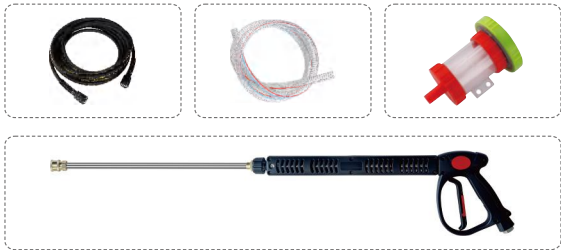

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-3200	220	3200	15	5.5	7.3	380	1450	85	880x515x655
ZX-3600	250	3625	15	7.5	10.0	380	1450	90	880x515x655
ZX-4350	300	4350	15	10.0	13.0	380	1450	108	880x515x655
ZX-7250	500	7250	22	22.0	30.0	380	1450	280	1240x830x970

ELECTRIC PRESSURE WASHER

SIRIUS


Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down

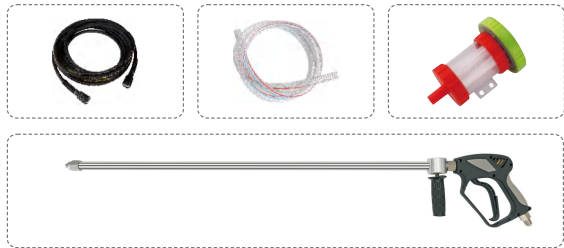

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-5075	350	5075	21	15	20	380	1450	210	1240x830x970
ZX-7250	500	7250	22	22.0	30.0	380	1450	280	1240x830x970

ELECTRIC PRESSURE WASHER

WALLMOUNTED

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down



Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
ZX-1450	100	1450	14	2.2	3.0	220	1450	60	625x445x585
ZX-1750	120	1750	14	2.5	3.3	220	1450	65	625x445x585
ZX-1850	130	1885	14	3.0	4.0	220	1450	68	625x445x585
ZX-2200	150	2175	14	3.0	4.0	380	1450	65	625x445x585
ZX-2900	200	2900	15	4.0	5.3	380	1450	69	625x445x585

DIESEL FUEL HIGH-PRESSURE WASHER



Technical parameters

Model	Working Pressure		Flow Rate	Power		Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	RPM	KG	MM
ZX-2500	150	2175	15	3.0	6.5	3400	45	690x575x535


GASOLINE HIGH-PRESSURE WASHER

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down

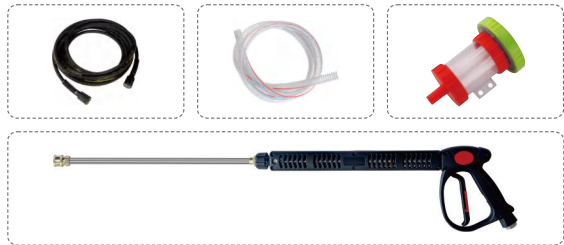

Technical parameters

Model	Working Pressure		Flow Rate	Power	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	HP	RPM	KG	MM
ZX-3600GF	250	3625	18	190HP	3400	98	810X630X660
ZX-2500GF	150	2175	16	170HP	3400	70	690X575X535




DIESEL FUEL HIGH-PRESSURE WASHER

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Matching

- Voltage and power can be specified
- Turn off the gun and shut it down

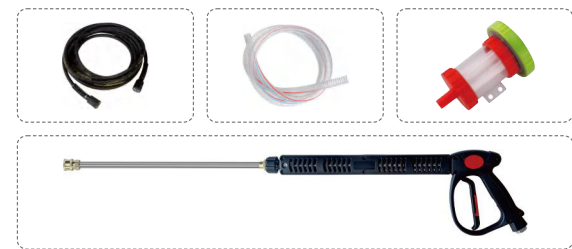

Technical parameters

Model	Working Pressure		Flow Rate	Power		Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	HP		RPM	KG	MM
ZX-3600DF	250	3625	18	188FE		3400	100	810X630X660
ZX-2900DF	200	2900	18	173FE		3400	70	690X575X535



Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Technical parameters

Model	Working Pressure		Flow Rate	Power		Speed	G.W.	Carton Size
	Bar		L/MIN	HP		RPM	KG	MM
ZX-3600GF	250		18	190		3600	75	810X630X660



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down

GASOLINE DIESEL HIGH-PRESSURE WASHER


Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down

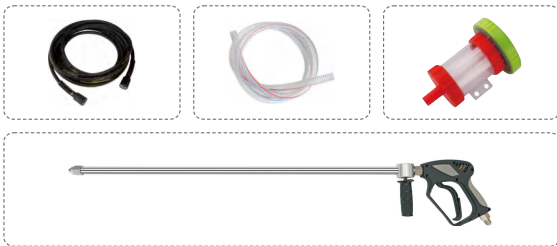


Technical parameters

Model	Working Pressure	Flow Rate	Power	Speed	G.W.	Carton Size
	Bar	L/MIN	HP	RPM	KG	MM
ZX-7250DF	500	22	292	3600	280	1120x860x1000

GASOLINE/DIESEL PRESSURE WASHER

Standard configuration

- High-performance electric-start gasoline/diesel engine
- Copper cylinder ceramic plunger diesel engine direct drive crankshaft connecting rod pump
- Electric start-8mmx10M high-pressure pipe
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components

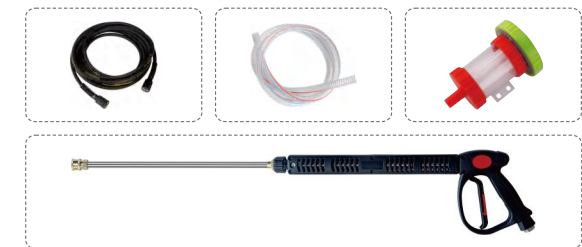

Technical parameters

Model	Working Pressure		Flow Rate	Power	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	HP	RPM	KG	MM
ZX-2500GF	150	2175	17	170FE/6.5HP	3600	80	1420X820X990
ZX-3600GF	250	3600	18	190FE/13HP	3600	100	1420X820X990
ZX-3600DF	250	3600	18	188FE/10HP	3600	110	1420X820X990

HIGH PRESSURE GUN SERIES



ZX-01

Max pressure:7250PSI/500BAR
Max Temperature:60°C/140° F
Max Flow: 31L/min\8.0GPM



ZX-02

Max pressure:7250PSI/500BAR
Max Temperature:60°C/140° F
Max Flow: 31L/min\8.0GPM



ZX-03

Max pressure:7250PSI/500BAR
Max Temperature:60°C/140° F
Max Flow: 31L/min\8.0GPM



ZX-04

Max pressure:7250PSI/500BAR
Max Temperature:60°C/140° F
Max Flow: 31L/min\8.0GPM



ZX-05

Max pressure:7250PSI/500BAR
Max Temperature:60°C/140° F
Max Flow: 31L/min\8.0GPM

HIGH PRESSURE GUN SERIES



ZX-06



ZX-07



ZX-08

Max pressure:7250PSI/500BAR
Max Temperature:60°C/140° F
Max Flow: 31L/min\8.0GPM



ZX-09

Max pressure:7250PSI/500BAR
Max Temperature:60°C/140° F
Max Flow: 31L/min\8.0GPM

HIGH PRESSURE PIPE SERIES



A



B

FLOOR WASH SERIES



Scrubbing rows A



Scrubbing rows B



Scrubbing rows C

PIPE COILER SERIES



Reel A



Reel B



Crankcase A



Flange



End caps



Copper block assembly



Influent tee



effluent tee



Quick couplings 1/4, 3/8



3/8 quick pick-up



18x1 quick connect



Water inlet connectors



Inlet water/outlet water
pluggs head



Pressure ring/water seal



Regulator spool assembly



Check valve assembly



Regulator single micro-acting



External return pressure regulator



Safety Valve A



Safety Valve B



800 kg pressure regulator



500 kg pressure regulator



Pressure gauge A



Pressure gauge B



Plunger oil seal



18 water seal components



Crankshaft oil seals



Check Valve Assembly A



Check Valve Assembly B



Connecting rod



Plunger, plunger pin



Connecting rod + plunger C



Bearing A



Bearing B



Crankshaft A



Crankshaft B



Inlet and outlet tee fixing screws



Gun tail joint



Stainless steel push-in



Stainless steel quick plug 18x1.5



Outlet valve cap



Valve ball, seat A



Valve ball, seat B



Valve ball, seat C



500 kg swivel nozzle



Swivel nozzle



Regulate sprinklers



500 kg high-pressure nozzle



800 kg rotary sprinkler



Couplings



Sprinkler head 0°



Sprinkler head 15°



Sprinkler head 25°



Sprinkler head 40°




Bell jar



Couplings



Abrasive blast gun heads A



Abrasive blast gun heads B



Abrasive blast gun heads C



Pipe cleaning nozzles A



Pipe cleaning nozzles B



Pipe cleaning nozzles C



Automatic switch



Start the switch



Small strainer A



Large filter A



Strainer A



Strainer B




Strainer C



Filter A



Filter B



Water inlet pipe



Micro motion sensors



Micro motion sensors



Foam jug A



Foam jug B